

Quick Start Guide

Lethal-GK1

Wireless Mechanical Keyboard



I. Important - Warnings and Safety

1. Do not place the keyboard near heat sources such as fire, radiators, stoves and other apparatus that produce heat.
2. Keep it dry. Do not allow the keyboard to get wet or expose to moisture/rain, else it increases the occurrences of fire or shock.
3. Use only those accessories supplied by FINGERS.
4. Refer all servicing to qualified personnel. Servicing is required when the keyboard has been damaged in any way. Any evidence of any attempt to open and/or alter the device, including any scratch, peeling, puncturing, or removal of any of the labels, will void the Limited Warranty.

Choking Hazard


This device may contain small parts which may be a choking hazard to children under 3. Keep small parts away from children.

II. In the box

- | | |
|-------------------------------------|------------------------------|
| 1 x QuikFINGERS Lethal-GK1 Keyboard | 1 x Switch and Keycap Puller |
| 1 x Type-C Cable for Interface | 1 x Quick Start Guide |
| 1 x Nano USB Receiver | 1 x Brand Note |

III. On-board Controls

Keyboard

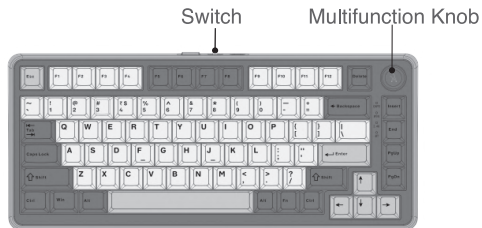


IV. Getting Started


1. Switch and Indicator



1. Type-C Port
2. Switch to change modes to Bluetooth®, Wired and 2.4 GHz Wireless
3. 2.4 GHz Receiver

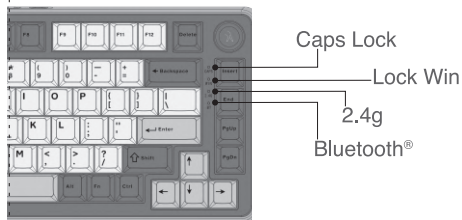


2. Wired Connection




- Turn on your PC or laptop.
- Switch the mode button to the centre.
- Connect the keyboard using the provided USB cable.
- Once the keyboard is connected, it will be automatically recognized, and the connection is successful.

3. Bluetooth® Connection



- Switch the mode button to the Bluetooth® mode.
- Short press FN + 1 / FN + 2 / FN + 3 to select Bluetooth® channel, and the Bluetooth® indicator will flash slowly.
- Long press FN + 1 / FN + 2 / FN + 3 for 5 secs to enter into pairing mode. The Bluetooth® indicator LED will start blinking fast.
- On your device, open Bluetooth® Settings→Add Device, then select “QF GK1 BT1/B2/B3” from the list. And the RGB lights will stay on, when paired successfully.

4. 2.4 GHz Wireless connection-FN+4



- Switch the mode button to 2.4 GHz mode.
- Short press FN + 4 to select 2.4 GHz channel, and the 2.4 GHz indicator will flash slowly.
- Long press FN + 4 for 5 secs to enter into pairing mode. The 2.4 GHz indicator LED will start blinking fast.
- Insert the 2.4 GHz USB Receiver (Dongle) into a USB port of the device. The device will automatically recognize your keyboard and RGB lights will stay on when paired successfully.

Note: If Bluetooth®/ 2.4 GHz pairing fails, the keyboard indicator will turn off and the keyboard will enter into sleep mode. Please try reconnecting it.

V.Using Knob

- By default, it is in multimedia mode.
 - ▶ Press: Mute / Unmute
 - ⚙ Rotate: Adjust Volume
- To switch to backlight mode, press & hold the knob for 3 seconds.
- The backlight will flash once, indicating the mode has changed.
 - ⚙ Press: Switch Backlight Mode
 - ⚙ Rotate: Adjust Brightness

VI. FN + Combination Keys function:

1. Backlights

FN + Backspace = On/Off backlight
FN + Insert = To Change Backlight Effect
FN + End = To Change Backlight colour
FN + Pg UP = To Change lighting effect direction
FN + Up Arrow = Increases brightness across 4 levels. When the brightness reaches maximum, Backlight flashes once.

FN + Down Arrow = Decreases brightness across 4 levels. When the brightness reaches minimum (Off), Backlight flashes once.
FN + Right Arrow = Increase blinking speed
FN + Left Arrow = Decreases blinking speed

2. FN shortcuts

i. Windows

FN + F1 = Computer	FN + F5 = Previous song	FN + F9 = Mute
FN + F2 = Homepage	FN + F6 = Next Song	FN + F10 = Decreases Volume
FN + F3 = Calculator	FN + F7 = Play/Pause	FN + F11 = Increase Volume
FN + F4 = Player	FN + F8 = Stop	FN + F12 = Mail

ii. macOS

FN+F1 = Decreases Screen Brightness	FN+F2 = Increase Screen Brightness	FN+F3 = Controller
FN+F4 = Program	FN+F5 = F5'	FN+F6 = F6'
FN+F7 = Previous Song	FN+F8 = Play/Pause	FN+F9 = Next Song
FN+F10 = Mute	FN+F11 = Decreases Volume	FN+F12 = Increase Volume

iii. Windows & macOS

FN+A = Windows	FN+S = macOS	FN+1 = BT1
FN+2 = BT2	FN+3 = BT3	FN+4 = 2.4G
FN+Right Ctrl = Battery Level	FN+ESC = Reset	FN+WIN = Lock WIN
WIN+L = Lock Screen		

VII. Battery

Low Power Mode & Charging

- When the battery level drops below 15%, the spacebar will flash red slowly.
- While charging, the spacebar will remain green.
- After the charging is complete, the spacebar will return to the normal RGB mode.

Battery Indication

- In **Wireless mode** (Bluetooth® / 2.4GHz), press and hold **FN + Right CTRL** to check the battery level.
- The number keys **1 to 0** will light up to indicate the remaining power (e.g., if keys 1-5 light up, it means **50%** battery remaining), and the backlight will turn off.
- When the keys are released, the keyboard will return to its previous lighting mode.

VIII. Custom Software

QuikFINGERS Lethal-GK1 keyboard is equipped with Windows and macOS customization functions. You can download it from

<http://fingers.co.in/Lethal-GK1-SW> or Directly from the below QR Code



IX. Care and Maintenance

1. Use a soft, damp cloth (water only) to clean the surface.
2. Do not use any chemicals, solvents, or cleaning solutions containing alcohol, ammonia or abrasives.
3. Do not allow any liquid to enter into any of the openings.

X. Specifications

Parameters

Connectivity

No. of keys

Interface

Macro Keys

Media Keys

Switch

Switch Life

Switch Travel Distance

Actuation Force

Switch Total Travel Force

Pre-Travel Switch

Pre-Lubed Switch

System Requirements

Power Source

Battery Backup

Cable Length

Cable Type

Dimensions

Weight

QuikFINGERS Lethal-GK1

3-in-1 -Wired (USB 2.0 to Type-C) +

Bluetooth® 5.0 + 2.4 GHz USB Receiver

82 keys + 1 Knob

Type-C USB

All Keys Programmable

12

Linear Switch

50 million life cycles

4.0 ± 0.5 mm

40 ± 10 gf

4.00±0.1mm, 4.00-0.4mm

2 ± 0.5 mm

2 ± 0.5 mm

Microsoft® Windows® | macOS® | Linux¹

4000 mAh Lithium re-chargeable Battery

Up to 15 hours²

1.8 m

Detachable Type-C Braided Cable

334.4 (L) x 143.6 (W) x 42.15 (H) mm

892 g

fingers.co.in | Ver.: 1.0.0

¹Software may not function smoothly on Linux-based devices.

²Tested under ideal conditions and varies depending on usage, RGB effects and connectivity.

³No designated shortcuts.

• Images shown may vary from actual product. • Specifications, features and appearance are subject to change without notice. • All logos, brands, trademarks and product names are properties of their respective owners. • Product warranty is governed by warranty terms mentioned on www.fingers.co.in • This product falls under e-waste (Management & Handling) Rules, 2011. For proper disposal method, visit our website www.fingers.co.in

