

Quick Start Guide

Fierce-GK7

Wireless Mechanical Keyboard



I. Important - Warnings and Safety

1. Do not place the keyboard near heat sources such as fire, radiators, stoves and other apparatus that produce heat.
2. Keep it dry. Do not allow the keyboard to get wet or expose to moisture/rain, else it increases the occurrences of fire or shock.
3. Use only those accessories supplied by FINGERS.
4. Refer all servicing to qualified personnel. Servicing is required when the keyboard has been damaged in any way. Any evidence of any attempt to open and/or alter the device, including any scratch, peeling, puncturing, or removal of any of the labels, will void the Limited Warranty.

Choking Hazard

This device may contain small parts which may be a choking hazard to children under 3. Keep small parts away from children.

II. In the box


- | | |
|-------------------------------------|------------------------------|
| 1 x QuikFINGERS Fierce-GK7 Keyboard | 1 x Switch and Keycap Puller |
| 1 x Type-C Cable for Interface | 1 x Quick Start Guide |
| 1 x Nano USB Receiver | 1 x Brand Note |

III. On-board Controls





IV. Getting Started

1. Switch to change modes to Bluetooth®, Wired and 2.4GHz Wireless

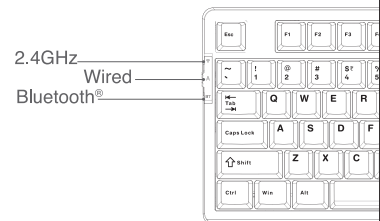


2. Charging Port & Indication Status

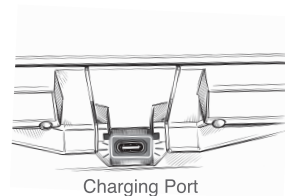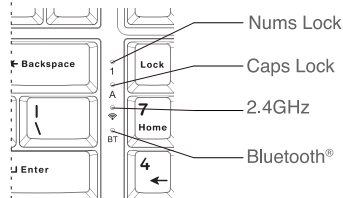

3. Wired Connection


- Turn on your PC or laptop.
- Switch the mode button to the centre.
- Connect the keyboard using the provided USB cable.
- Once the keyboard is connected, it will be automatically recognized, and the connection is successful.

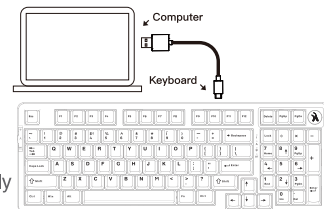


4. Bluetooth® Connection

Bluetooth® 1 / 2 / 3 (FN + 1 / FN + 2 / FN + 3)

- Switch the mode button to Bluetooth® mode.
- Short press FN + 1 / FN + 2 / FN + 3 to switch to Bluetooth® 1 / 2 / 3.
- Long press FN + 1 / FN + 2 / FN + 3 for 3 seconds to enter pairing mode.
- Bluetooth® indicator colours:
 - Bluetooth® 1: Red • Bluetooth® 2: Blue • Bluetooth® 3: Yellow
- During pairing, the selected number key light flashes in the same colour.
- Slow flashing indicates reconnection.
- After successful connection, the Bluetooth® indicator light turns green and stays ON.
- If pairing fails, the device enters sleep mode after 1 minute.
- If reconnection fails, the device enters sleep mode after 20 seconds.
- On your device, open Bluetooth® Settings → Add Device, then select “QF GK7 BT1 / BT2 / BT3”.

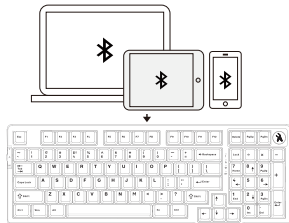

5. 2.4GHz Wireless connection

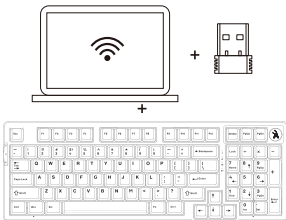

- Switch the mode button to 2.4GHz mode.
- Short press FN + 4 to switch to 2.4GHz.
- Long press FN + 4 for 3 seconds to enter pairing mode.
- The 2.4GHz indicator light is green.
- During pairing, the 4 key light flashes green.
- Slow green flashing indicates reconnection.
- After successful connection, the 2.4GHz indicator light stays green and remains ON.
- If pairing fails, the device enters sleep mode after 1 minute.
- If reconnection fails, the device enters sleep mode after 20 seconds.

Note: If Bluetooth®/ 2.4GHz pairing fails, the keyboard indicator will turn off and the keyboard will enter into sleep mode. Please try reconnecting it.

V. FN + Combination Keys function:

1. Backlights

FN + Backspace: Backlight effect on/Off
FN + I: Change Backlight effects
FN + Right Arrow →: Change backlight colour (8 colours + RGB Adjustment)
FN + Left Arrow ←: Change light effect direction
FN + Up Arrow ↑: Brightness Increase - Supports five brightness levels. When the maximum level is reached, the indicator light flashes 3 times.

FN + Down Arrow ↓: Brightness Decrease - Supports five brightness levels. When the minimum level is reached, the indicator light flashes 3 times.
FN & ⇨: Increase Blinking Speed
FN & ⇩: Decrease Blinking Speed

2. FN shortcuts

i. Windows (FN+ A)

FN + F1: Decrease display brightness level	FN + F5: Mail	FN + F9: Next Track
FN + F2: Increase display brightness level	FN + F6: Homepage	FN + F10: Mute
FN + F3: Task View (Win + Tab)	FN + F7: Previous Track	FN + F11: Volume Decrease
FN + F4: This PC (Win + E)	FN + F8: Play/Pause	FN + F12: Volume Increase

ii. macOS (FN+ S)

FN + F1: Decrease display brightness level	FN + F7: Previous Track	FN + F11: Volume Decrease
FN + F2: Increase display brightness level	FN + F8: Play/Pause	FN + F12: Volume Increase
FN + F3: Toggle	FN + F9: Next Track	
FN + F4: Console	FN + F10: Mute	

iii. Windows & macOS

FN + A = Windows	FN + S = macOS	FN + 1 = BT1
FN + 2 = BT2	FN + 3 = BT3	FN + 4 = 2.4G
FN + Right Ctrl = Battery Level	FN + ESC = Reset	FN + WIN = Lock WIN
WIN + L = Lock Screen		

VI. Battery Indication

Battery Status

- When the battery is low, the spacebar indicator light flashes red.
- When the battery is very low, the keyboard automatically turns off in wireless mode.
- Connect the charging cable to resume normal operation.

Charging

- Connect the keyboard to a power source using a USB charging cable. The spacebar light turns red for about 10 seconds, indicating charging in progress, then returns to the normal lighting effect.
- When fully charged, the spacebar light turns green for about 10 seconds, then returns to the normal lighting effect.

Battery Level Check

- Press FN + Ctrl + R to check the battery level.
- The indicator lights show the battery level as below:
 - Red: 1% - 30%
 - Yellow: 31% - 50%
 - Green: 71% and above

VII. Using Knob

- By default, it is in multimedia mode.
 - Press: Mute / Unmute
 - ✱ Rotate: Adjust Volume
- To switch to backlight mode,
 - press & hold the knob for 3 seconds.
- The backlight will flash once, indicating the mode has changed.
 - ✱ Press: Switch Backlight Mode
 - ✱ Rotate: Adjust Brightness

VIII. Custom Software

QuikFINGERS Fierce-GK7 keyboard is equipped with customization functions. You can download it from <http://fingers.co.in/Fierce-GK7-SW> or Directly from the across QR Code



IX. Care and Maintenance

1. Use a soft, damp cloth (water only) to clean the surface.
2. Do not use any chemicals, solvents, or cleaning solutions containing alcohol, ammonia or abrasives.
3. Do not allow any liquid to enter into any of the openings.

X. Specifications

Parameters	QuikFINGERS Fierce-GK7
Connectivity	3-in-1 -Wired (USB 2.0 to Type-C) + Bluetooth® 5.0 + 2.4 GHz USB Receiver
No. of keys	96 keys + 1 Knob
Interface	Type-C USB
Macro Keys	All Keys Programmable
Media Keys	12
Switch	Linear Pre-Lubed Switches
Switch Life	50 million life cycles
Switch Travel Distance	4.0 ± 0.5 mm
Actuation Force	40 ± 10 gf
Switch Total Travel Force	4.00±0.1mm, 4.00-0.4mm
Pre-Travel Switch	2 ± 0.5 mm
Pre-Lubed Switch	2 ± 0.5 mm
System Requirements	Microsoft® Windows® I macOS I Linux
Power Source	4000 mAh Lithium re-chargeable Battery
Battery Backup	Up to 24 hours ¹
Cable Length	1.8 m
Cable Type	Detachable Type-C Braided Cable
Dimensions	387.5 (L) x 136.8 (W) x 44 (H) mm
Weight	975 g

fingers.co.in | Ver.: 1.0.0

¹Tested under ideal conditions and varies depending on usage, RGB effects and connectivity.
²No designated shortcuts.

• Images shown may vary from actual product. • Specifications, features and appearance are subject to change without notice. • All logos, brands, trademarks and product names are properties of their respective owners. • Product warranty is governed by warranty terms mentioned on www.fingers.co.in • This product falls under e-waste (Management & Handling) Rules, 2011. For proper disposal method, visit our website www.fingers.co.in

