



20.7

Satin-2074

52.58 cm (20.7)

Quick Start Guide


I. Important - Warnings & Safety Instructions

1. Do not place the product near heat sources such as fire, radiators, stoves, light candles and other apparatus that produce heat.
2. Use only those accessories supplied by FINGERS.
3. Refer all servicing to qualified personnel. Servicing is required when the monitor has been damaged in any way. Any evidence of any attempt to open and/or alter the device, including any scratch, peeling, puncturing, or removal of any of the labels, will void the Limited Warranty.

II. In the box

1 x FINGERS Satin-2074 LED Monitor	1 x Monitor Stand
1 x Power Adapter	1 x Quick Start Guide
1 x Monitor Cable	


III. On-board Controls

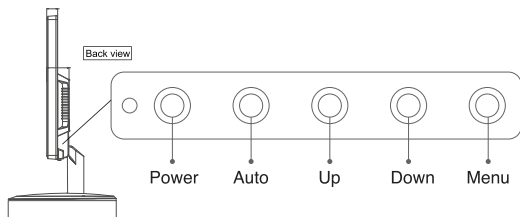


Button	Function
POWER	Turn on/off the monitor
AUTO	Back to last menu, exit and save/ Auto adjust
UP (+)	Move up/increase value
DOWN (-)	Move down/decrease value
MENU	Activate the OSD window/ Activate the selected function

IV. Installations Steps

1. Take out the stand and place it on a flat table as shown in below image.




2. Take out the monitor body, place it on a flat table and keep the screen side downward.




3. Install the base with a stand of monitor body tightly.

Please Note that there is a ratchet on the base to fix it as per notch location as shown in below image.




Stand Notch Location





Monitor Notch Location

4. The setup is done and the required cables can be connected.





V. Steps to remove the stand

1. Place the monitor upside-down on a flat table.




2. Please hold on to the monitor body, press the lock, pull the ratchet up on the base and draw out the base at the same time, as shown in the image below.



VI. Viewing Adjustments

To get the best viewing, we suggest facing the screen of the monitor and adjusting it to your perspective according to your personal preference. Please hold the monitor stand support during angle adjustment to avoid directly touching the display. The display angle can be adjusted within -5° to 15° range.



Note:

1. Make sure there are no objects surrounding the monitor before adjusting the monitor angle, to prevent the bump of the monitor screen with any objects during the adjustment.
2. Make sure the monitor is on a flat table and not on an unbalanced surface during the adjustment.
3. We recommend holding the base stand with one hand while gently adjusting the angle by holding the top of the monitor with another hand.

VII. Care and Maintenance

1. Unplug the monitor power plug before cleaning it.
2. Use the cleaning kit & spray the cleaning liquid on the cleaning cloth, and then gently wipe on the display surface.
3. Use a soft cloth to clean the surface.
4. Plug in the monitor power plug after the cleaning process is complete and then switch on the monitor's power.
5. Do not use any chemicals, solvents, or cleaning solutions containing alcohol, ammonia, or abrasives. Do not allow any liquid to enter any of the openings

VIII.Tech Specs

Parameters		Satin-2074
Display	Panel type	52.58 cm (20.7) TN LCD Panel
	Panel Size	457.92 (H) x 257.58 (V) mm
	Screen size	52.58 CM (20.7)
	Maximum resolution	1920 x 1080 pixels
	Colour	16.7 million
	Refresh rate	75 Hz
	Response time	5 ms (Typical, On-Off)
	Dynamic Contrast Ratio	500000:1
	Static Contrast Ratio	600:1
	Brightness	200 cd/m ² (max.)
	Aspect ratio	16:9
Connectivity	Viewing angle	H:90° I V:65°
	Pixel pitch	0.2385(H) x 0.2385(V) mm
Connectivity	Lighting type	LED
	Analog Input	VGA x 1
Power	Digital Input	HD Interface x 1
	Power Consumption	22 Watts (Max.)
	Stand-by Power	≤1 Watts
Environmental	Power Supply	DC 12V/2.0A
	Temperature (Operating)	0°C~ 50°C
	Temperature (Non-Operating)	-20°C~ 60°C
	Humidity (Operating)	20% - 60% RH
Features	Humidity (Non-Operating)	20% - 80% RH
	Tilt angle	-5 to +15°C
	Low Blue Mode	Yes
	Flicker Free	Yes (DC dimming)
	Anti-Glare	Yes
Dimensions and weight	Kensington Lock Support	Yes
	Wall Mountable	75 x 75 mm
	Monitor (W x H x D)	488.3 (L) x 200 (W) x 366.4 (H) mm (with stand)
	Net Weight	2.2 KG

fingers.co.in | Ver.: 1.0.0

• Images shown may vary from actual product. • Specifications, features and appearance are subject to change without notice. • All logos, brands, trademarks and product names are properties of their respective owners. • Product warranty is governed by warranty terms mentioned on www.fingers.co.in • This product falls under e-waste (Management & Handling) Rules, 2011. For proper disposal method, visit our website www.fingers.co.in

