fingers.co.in



fingers quik

WINGS

FASHION PC CASE


Installation Guide


A. For Cabinet Opening:

1. Remove the protective gum tapes from the cabinet panels.

2. To open the left and right-side panels, follow the steps below:


- First, remove the screw from the back side to open the left side panel, as shown in the figure.
- Repeat the same process to remove the screw from the back side to open the right-side mesh panel, as indicated in the marked area of the below image.
- After removing the screw, pull the panel outward to open it, as shown in the below image.

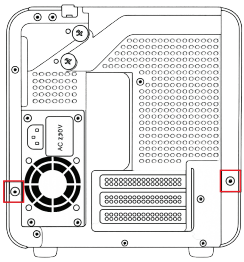


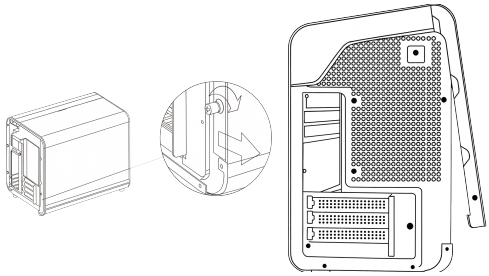

3. To lock the panel in the open position:

Please align the circular hole with the orange locking latch and press the latch to secure the panel in place.

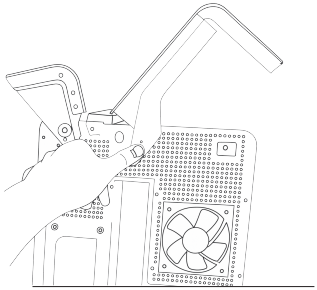


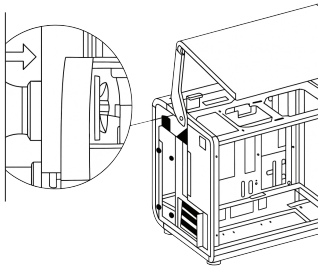


Note:

On the left side, the panel can be locked in two positions:

1. First Position: Match the hole and press the orange latch to lock.
2. Second Position:
   Lock the panel at the top near the glass panel, as shown in the across image.

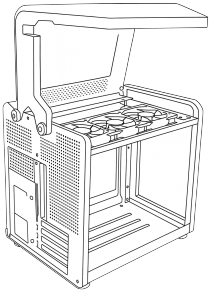


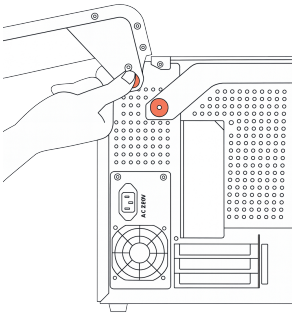


Repeat this process for the right-side panel as well. Please note, the right-side panel has only one locking position.


B. Installation of SMPS:

1. Remove the bracket from the cabinet by removing the 4 Screws.And attach SMPS to this bracket as shown in below image.

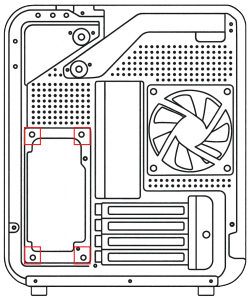





2. Now place the SMPS and fit this with the screws.

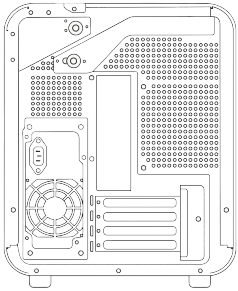


C. Installation of HDD/SSD:


1.To install HDD/SSD, the net in the below image needs to be removed.

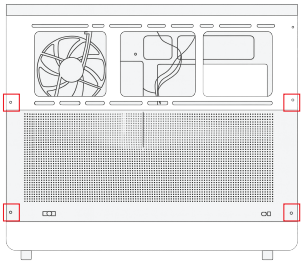

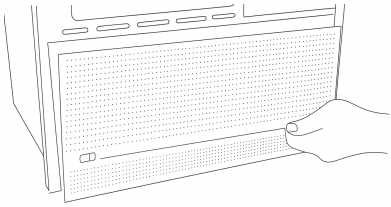


2. Now remove the HDD bracket screws from the bottom side and take out the SSD and HDD brackets.

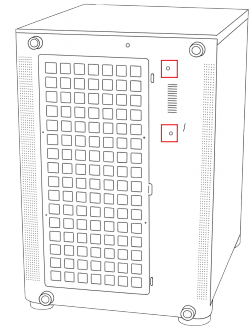


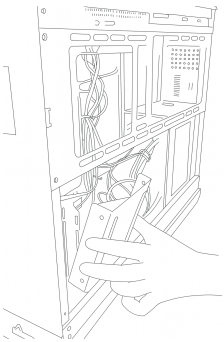

3. Insert SSD/HDD to the bracket as shown in below image.

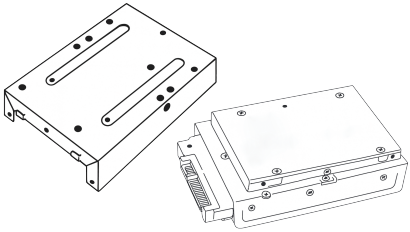



4. Reattach the bracket inside the cabinet & secure it with screws. Then, fix the upper side mesh/net panel.

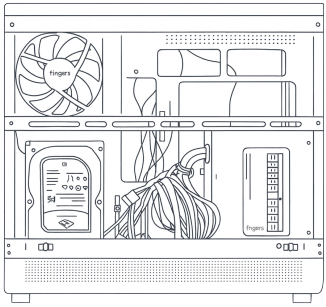


D. Setting Digital display screen:

1. Plug the display connector into the USB port.





2. Install the software by downloading from the website - https://www.fingers.co.in/computer-peripherals/pc-cases/wings/
3. Install the software on PC.
4. Now the software can automatically display data and can be set to start automatically when the machine/PC is turned on.
5. When the software is launched - the digital display screen will remain continuously on. Close the software - the digital display will automatically turn off after few seconds.

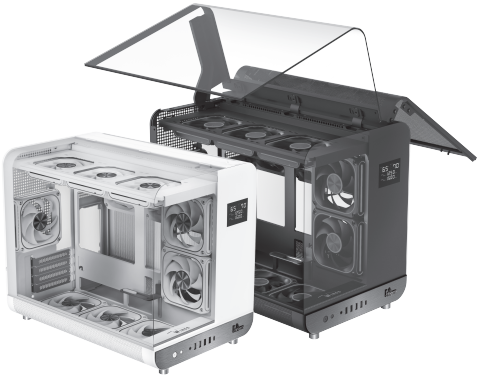

EPR Details

fingers.co.in I Ver.: 1.0.0

• Images shown may vary from actual product. • Specifications, features and appearance are subject to change without notice. • All logos, brands, trademarks and product names are properties of their respective owners. • Product warranty is governed by warranty terms mentioned on www.fingers.co.in • This product falls under e-waste (Management & Handling) Rules, 2011. For proper disposal method, visit our website www.fingers.co.in